


FAIRFIELD CREATIONS

lano carpets

آرنوس

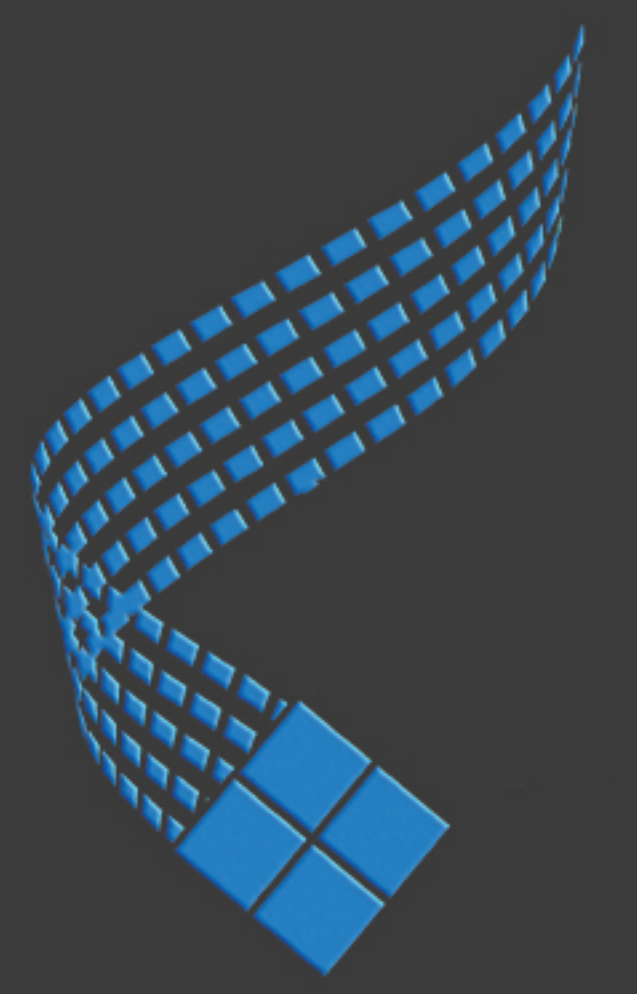

▲ FAI.230



▲ FAI.420



▲ FAC.221



▲ FAI.450




▲ FAI.260




▲ FAC.211



▲ FAI.220*

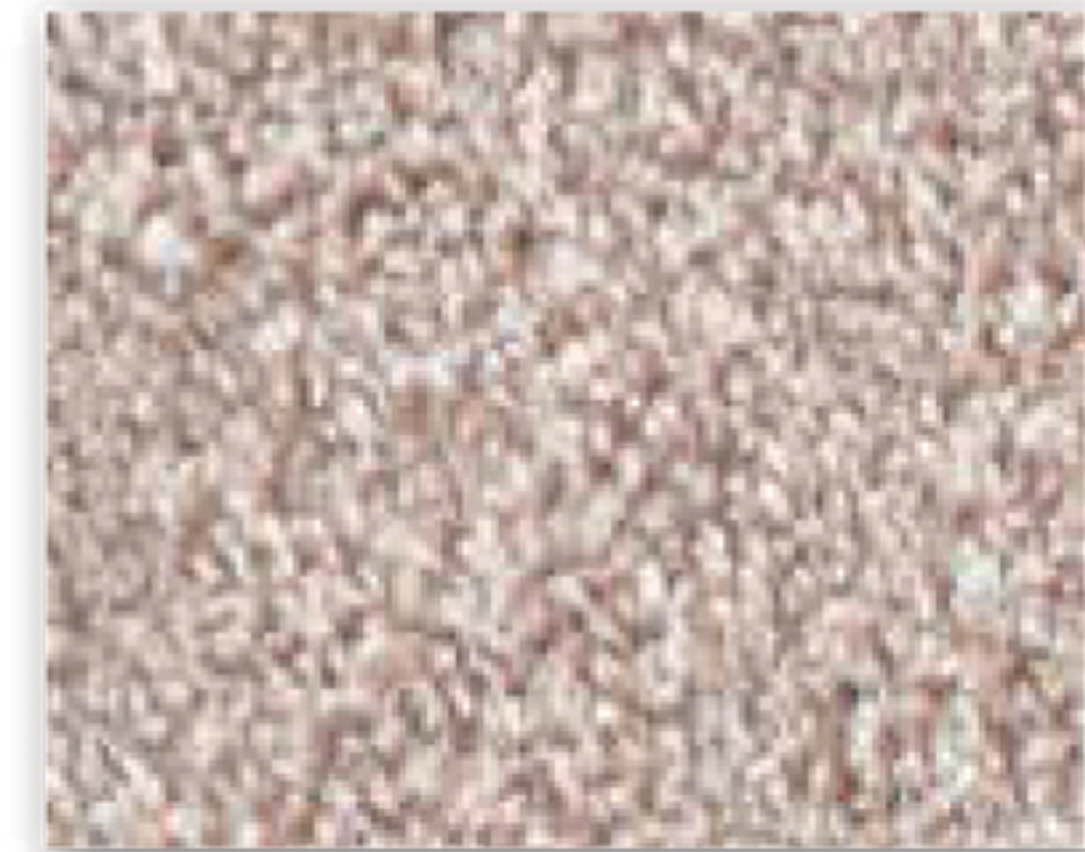

▲ FAI.250

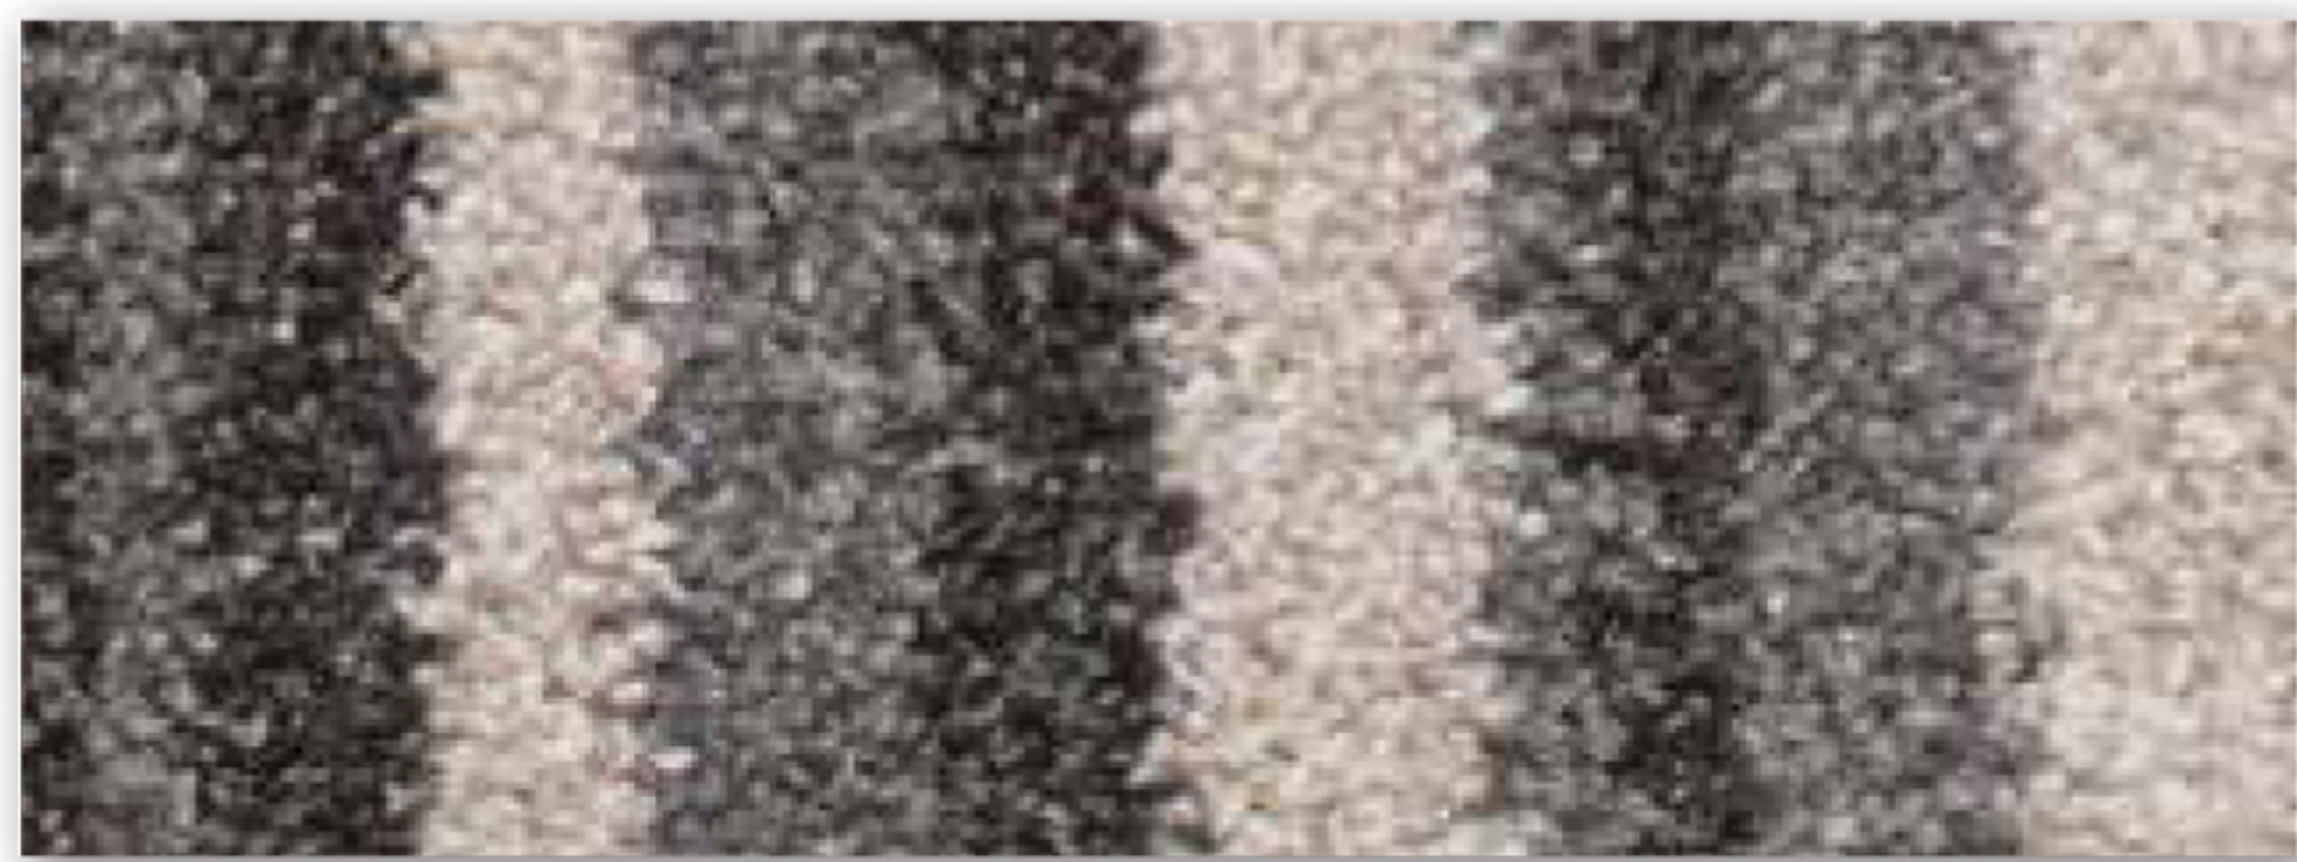


▲ FAC.841*



▲ FAI.870



▲ FAI.840

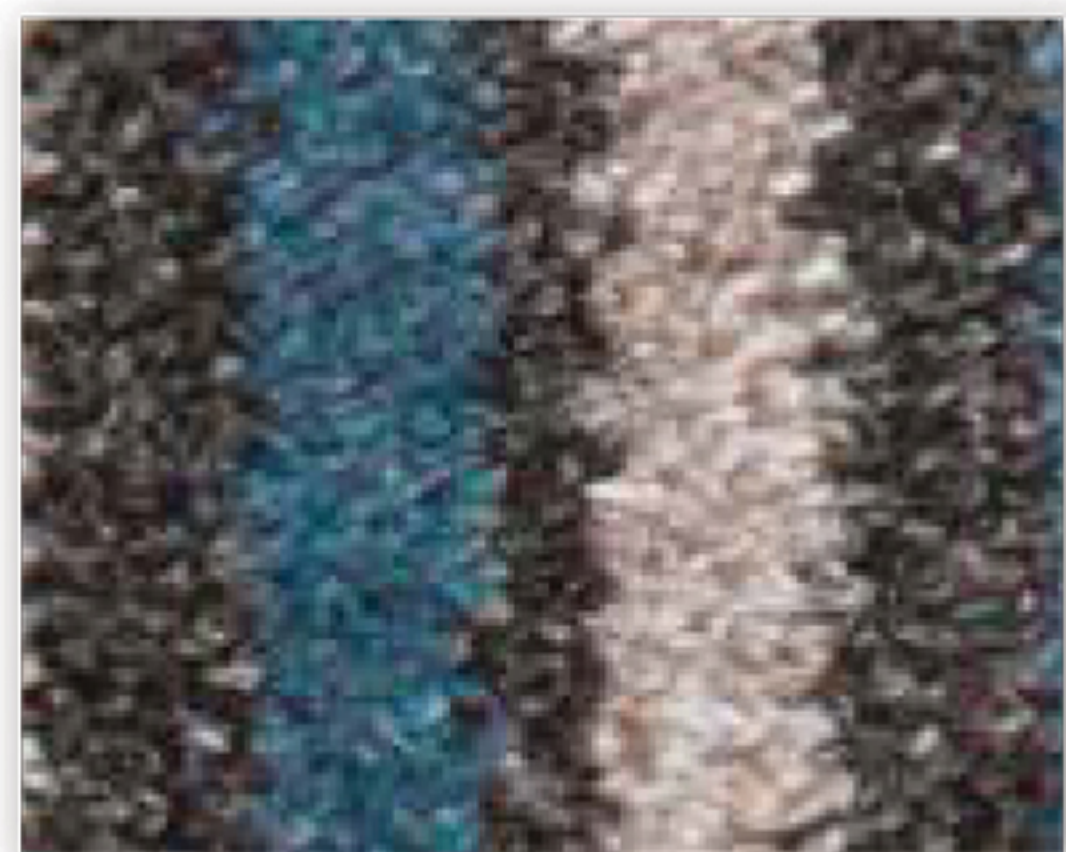

▲ FAC.731*




▲ FAI.730




▲ FAI.820



▲ FAC.031*

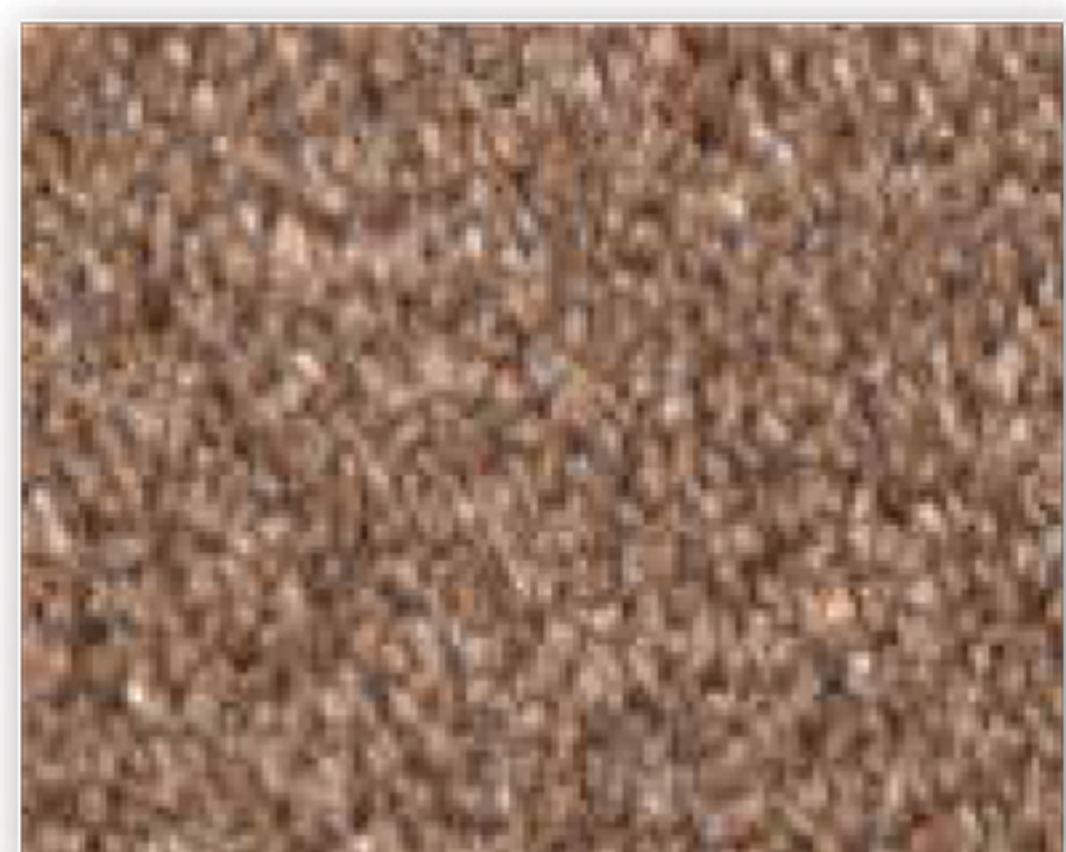

▲ FAI.270

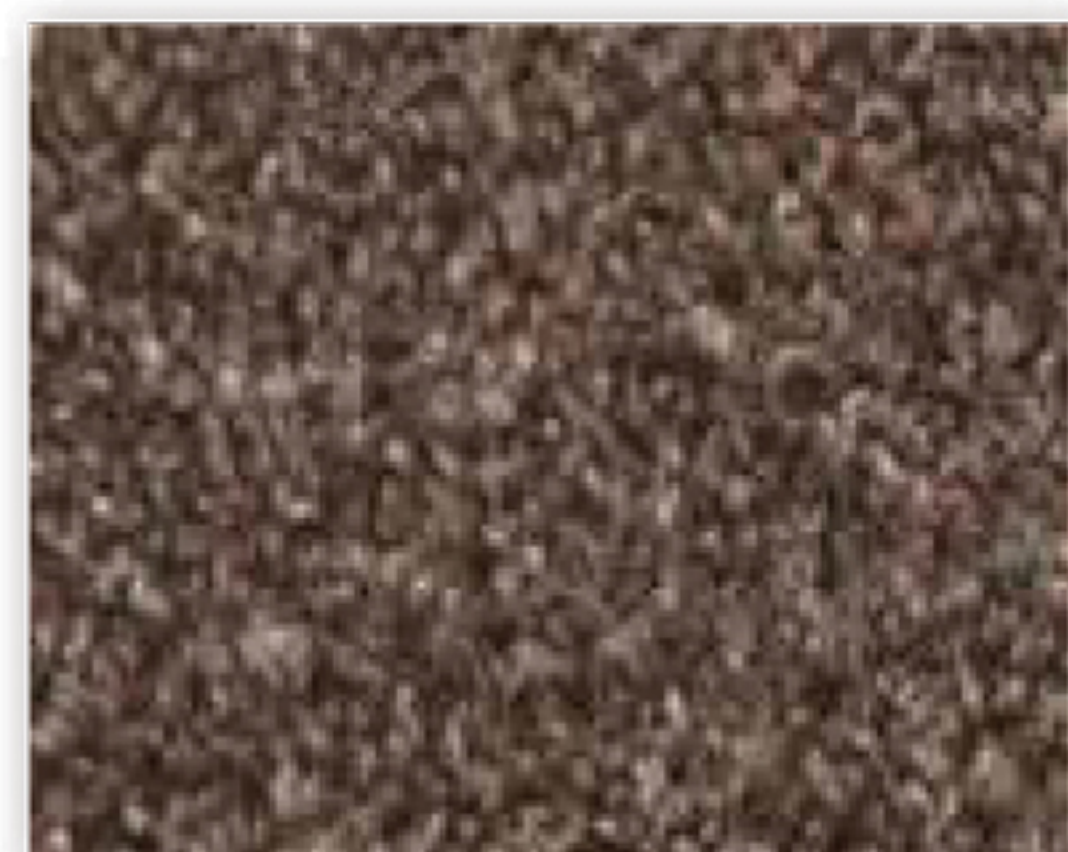


▲ FAI.280




▲ FAI.030




▲ FAI.080

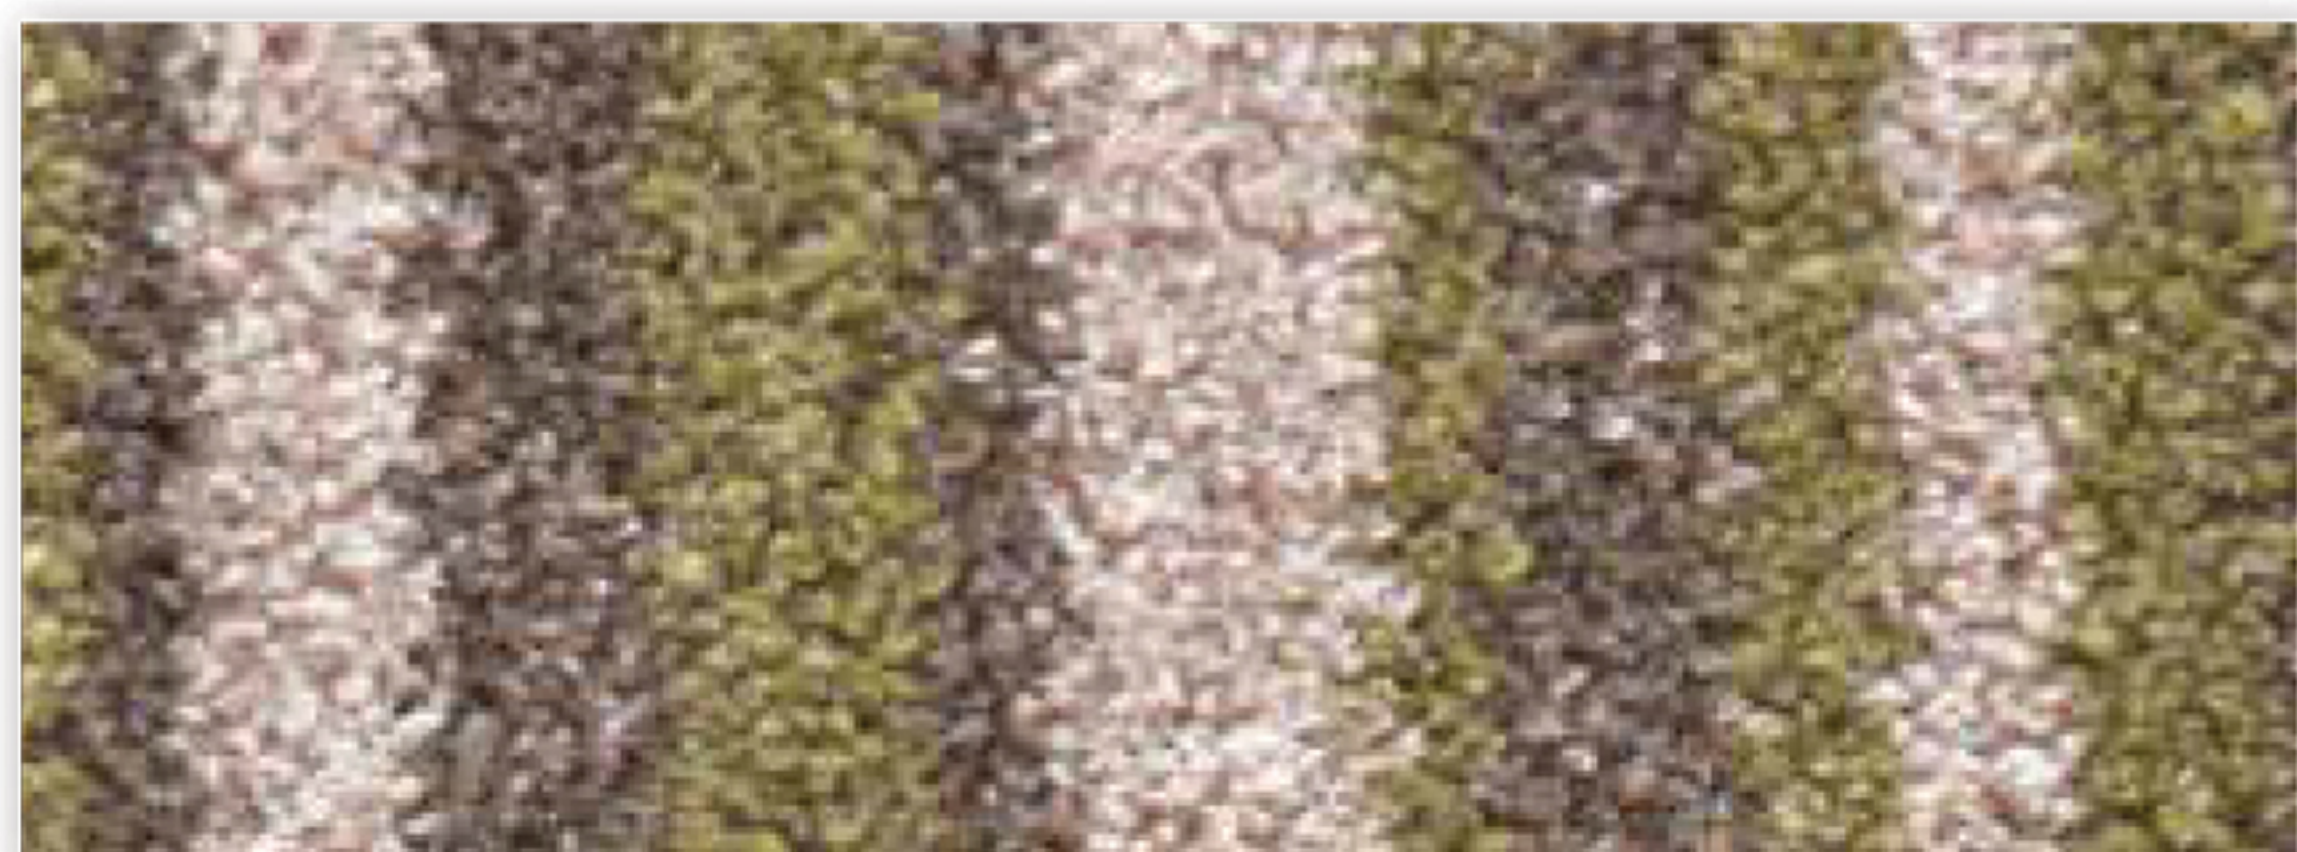

▲ FAC.571*

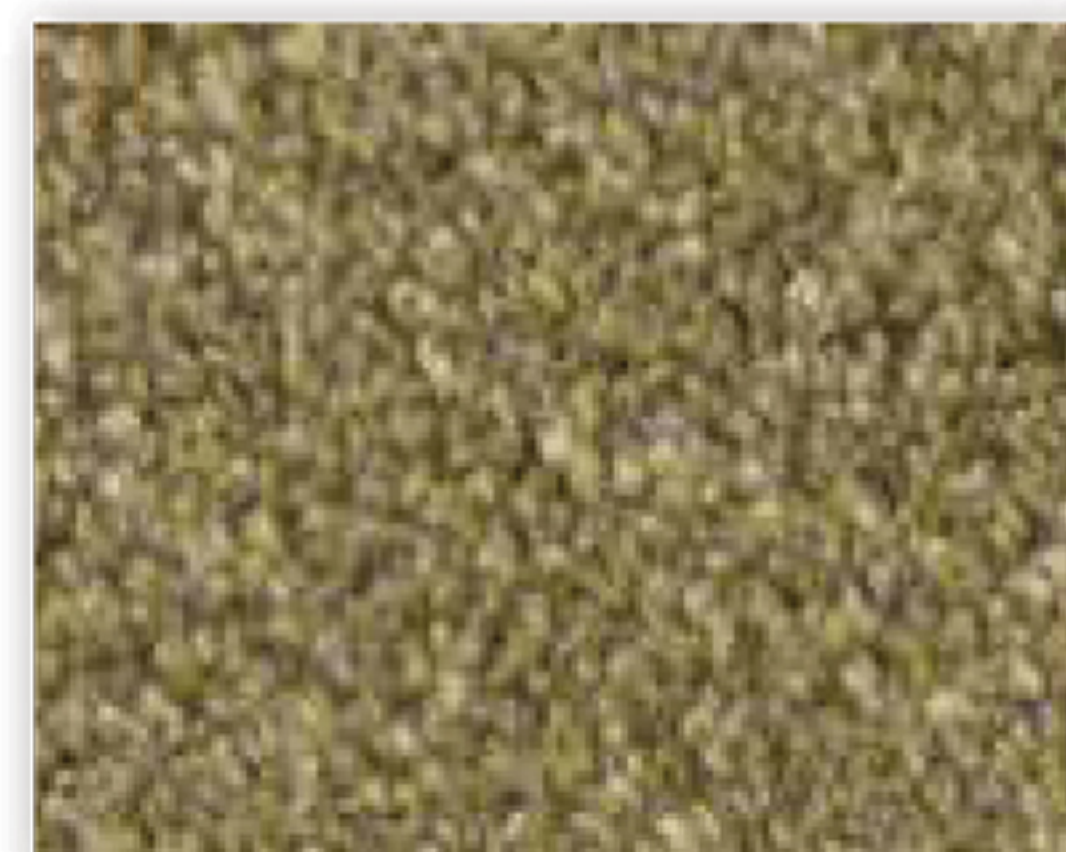

▲ FAI.580

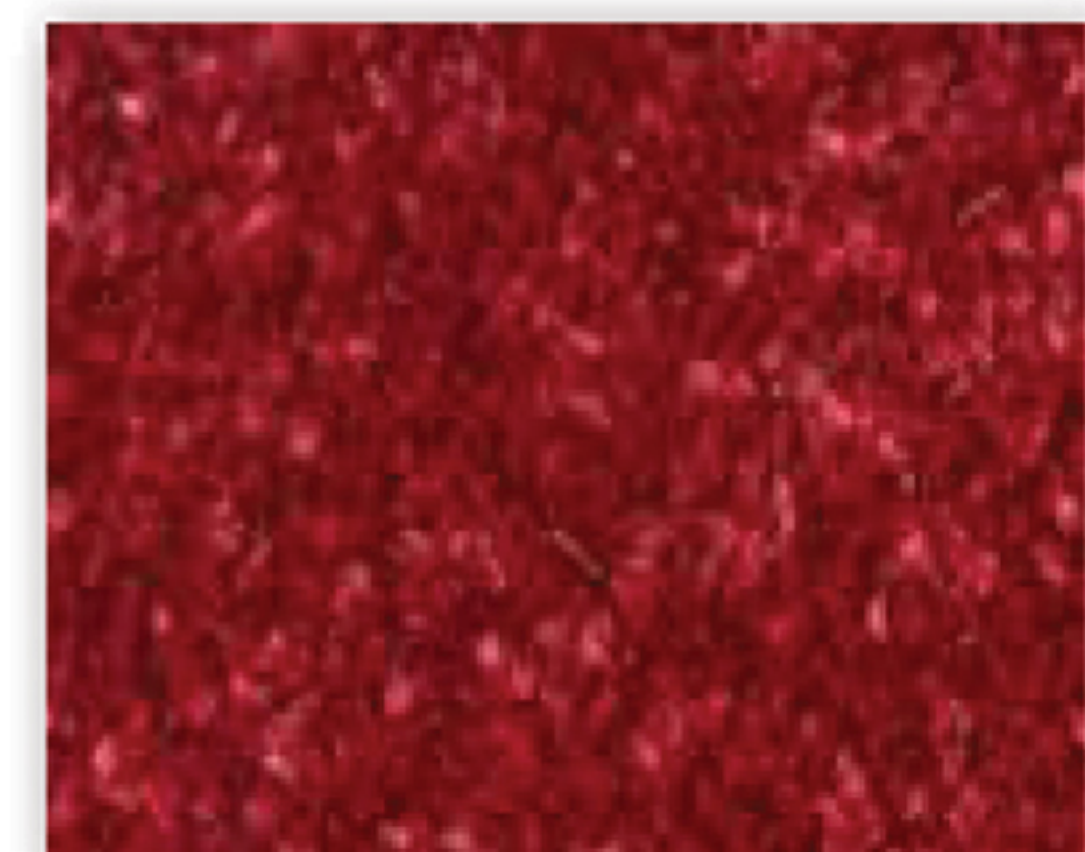


▲ FAI.110

FAIRFIELD CREATIONS

lano carpets

آرتنوس

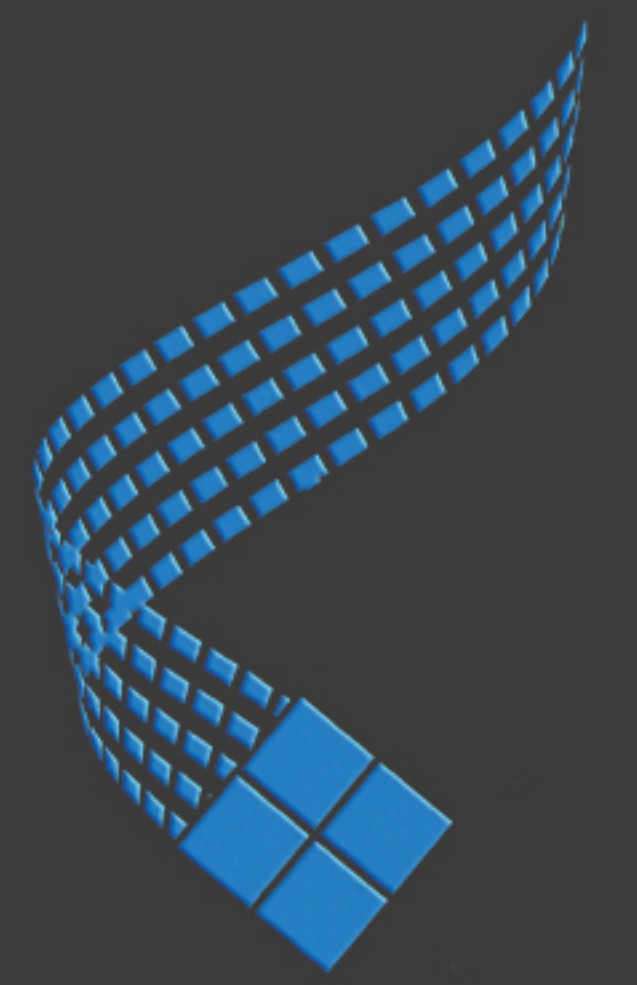


| | | | |
|--|--|--|---|
| Fabricagemethode Technique de fabrication Manufacturing process Herstellungsart Tecnica di fabbricazione tufted, 1/10" twist | Poolsamenstelling Nature du velours Pile composition Polmaterial Composizione felpa PP | Tuftdoek Premier dossier Primary backing Trägermaterial Tela di supporto woven | Rugtype Envers Secondary backing Rücken Sottofondo SB |
| Totale dikte Hauteur totale Total height Gesamthöhe Spessore totale ± 9,0 mm | Nuttige poolhoogte Hauteur de velours utile Effective pile height Tatsächliche Florhöhe Spessore felpa utile ± 7,0 mm | Breedte Largeur Width Breite Altezza ± 400-500 cm | Aantal noppen/m² Nombre de points/m² Number of knots/sqm Noppenzahl/m² Numero di punti/mq ± 228520 |
| Poolinzetgewicht/m² Poids mis en oeuvre/m² Pile weight/sqm Poleinsatzgewicht/m² Peso felpa/mq ± 1200 gr | Totaal gewicht/m² Poids total/m² Total weight/sqm Poleinsatzgewicht/m² Peso totale/mq ± 2170 gr | EN 13501-1 Brandgedrag Comportement au feu Fire behaviour Brennverhalten Reazione al fuoco E_{fl} | EN 1307 Classificatie Classification Classification Klassifizierung Classificazione Class 22 Domestic General |
| DIN 52612 Warmtedoorlaatweerstand Résistivité thermique Thermal retention Wärmedurchlaßwiderstand Resistenza termica ± 0,066 m²/kW | TOG rating ± 0,66 | ISO 105 B02 Lichtechtheid Solidité à la lumière Lightfastness Lichtechtheid Solidità colori alla luce ≥ 7 | ISO 105 E01 Waterechtheid verkleuring Solidité à l'eau changement couleur Waterfastness change in colour Wasserechtheit Änderung der Farbe Solidità colori all'acqua cambio colore ≥ 4-5 |
| ISO 105 E01 Waterechtheid uitbloeding Solidité à l'eau dégorgeement Waterfastness staining Wasserechtheit anbluten Solidità colori all'acqua sfumatura colore ≥ 4-5 | ISO 105 X12 Wrijfechtheid droog Solidité au frottement sec Rubbingfastness dry Reibungechtheit trocken Solidità colori allo sfregamento a secco ≥ 4-5 | ISO 105 X12 Wrijfechtheid nat Solidité au frottement humide Rubbingfastness wet Reibungechtheit nass Solidità colori allo sfregamento umido ≥ 4-5 | Ce produit s'inscrit dans la démarche HQE (F.D.E.S. selon la norme NF P01-10 disponible sur demande). F.D.E.S. = fiche de données environnementales et sanitaires. HQE |

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading/pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com



HQE

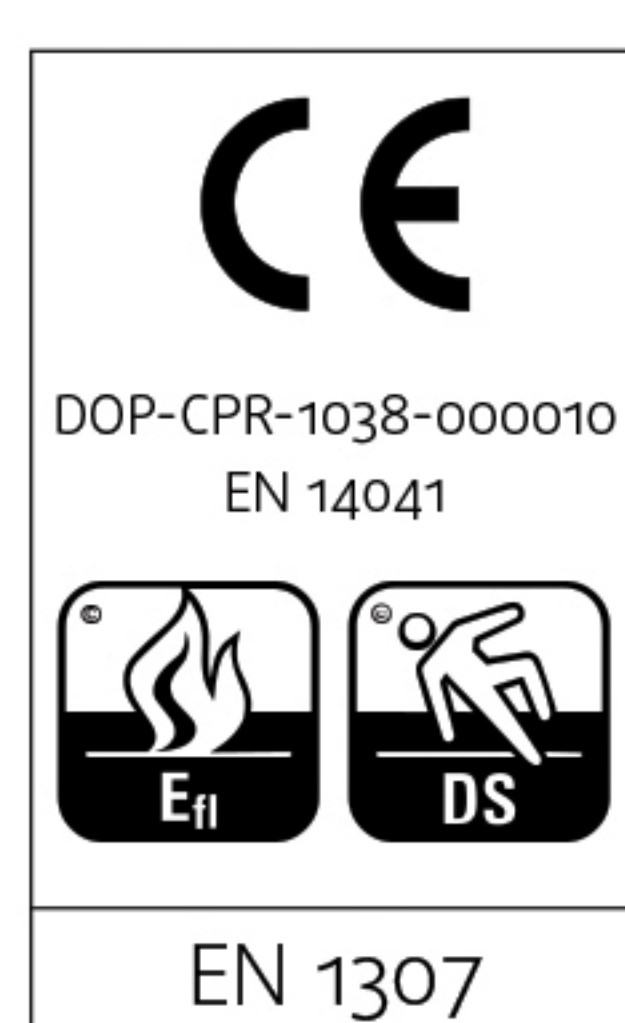

BQA_QM5019_C_199460