
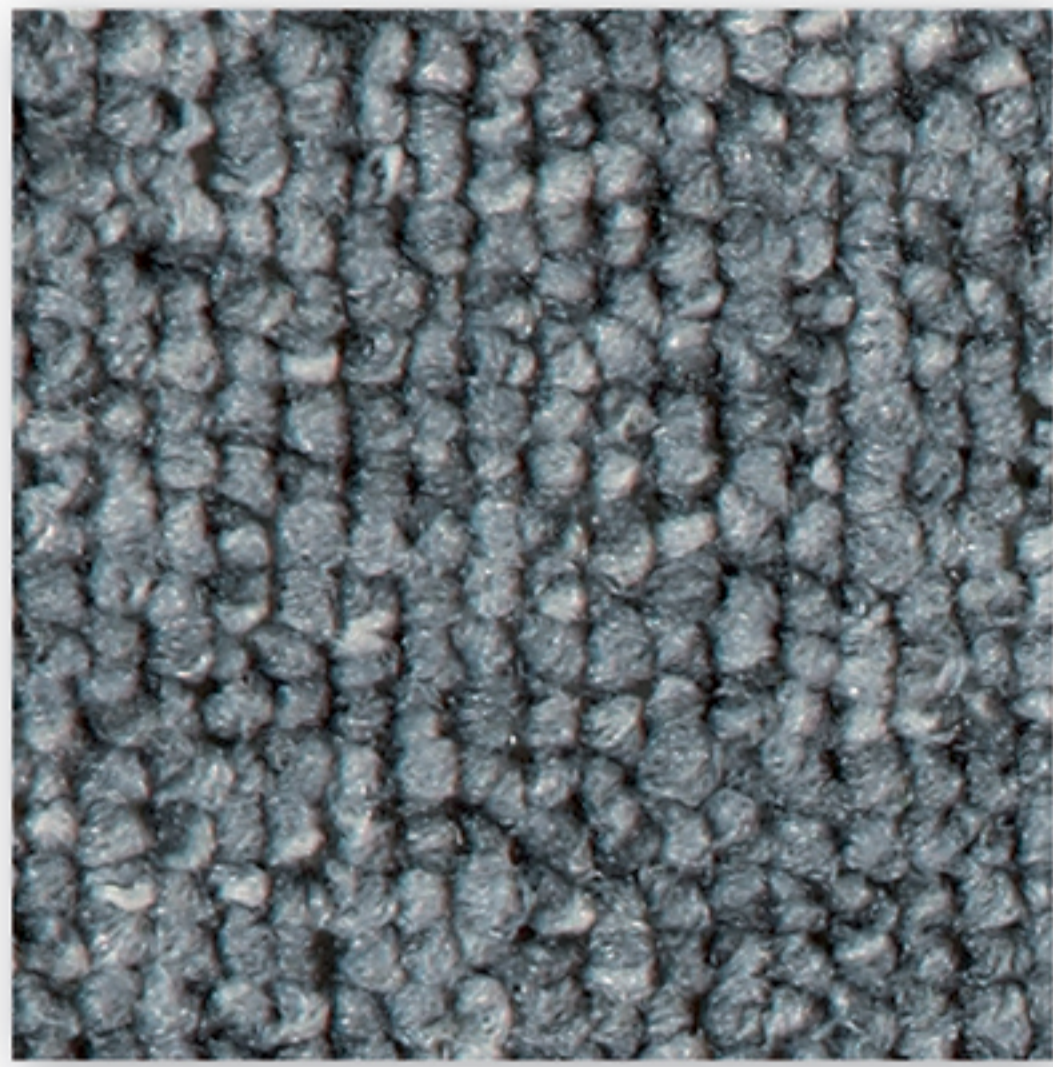



QUARTZ

lano carpets


آرتوس

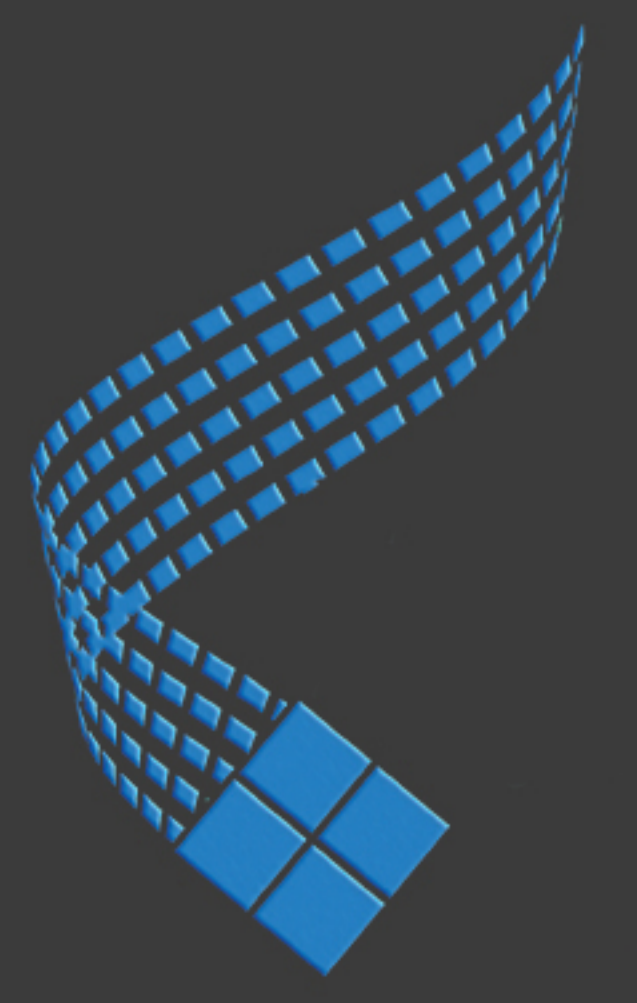


▲ QUA.820

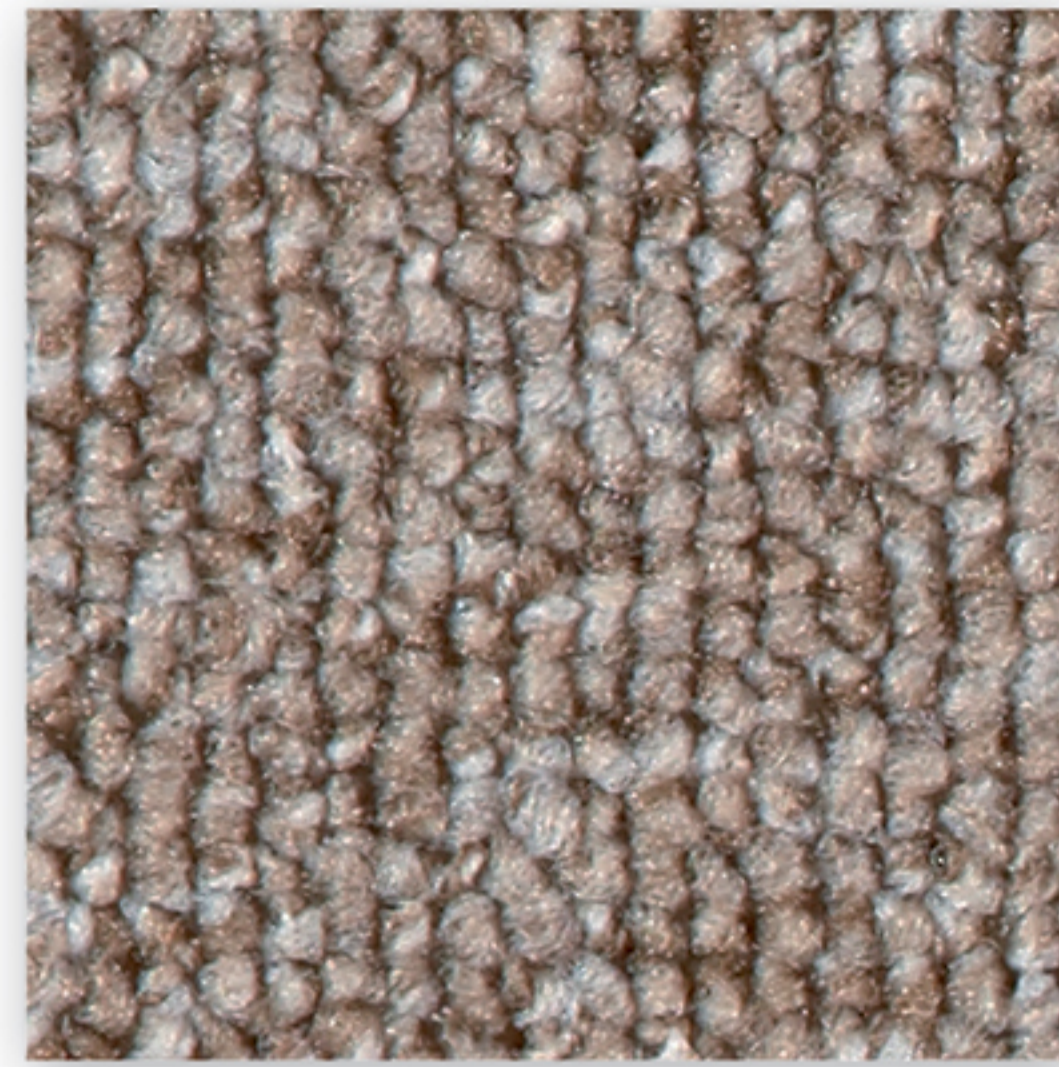


▲ QUA.260

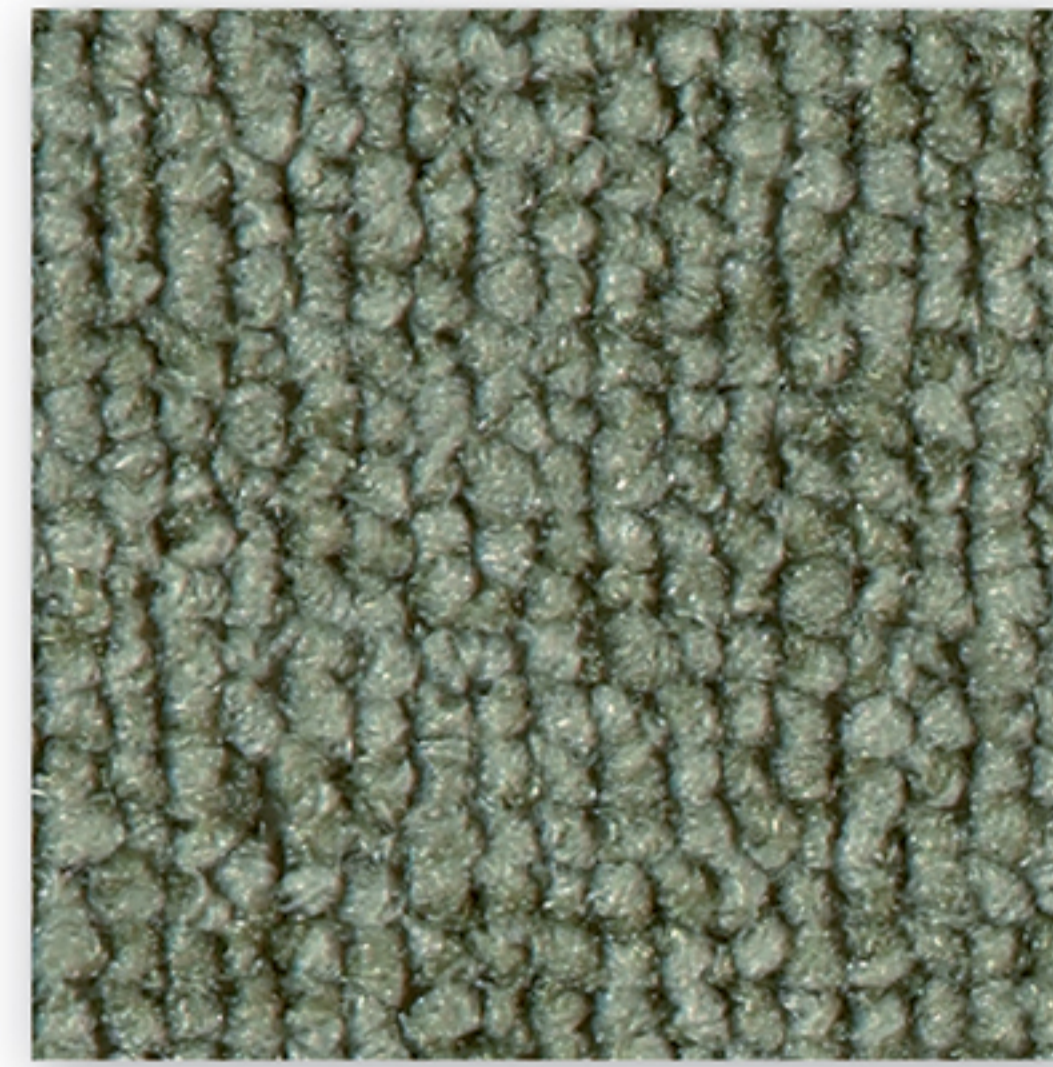

▲ QUA.563

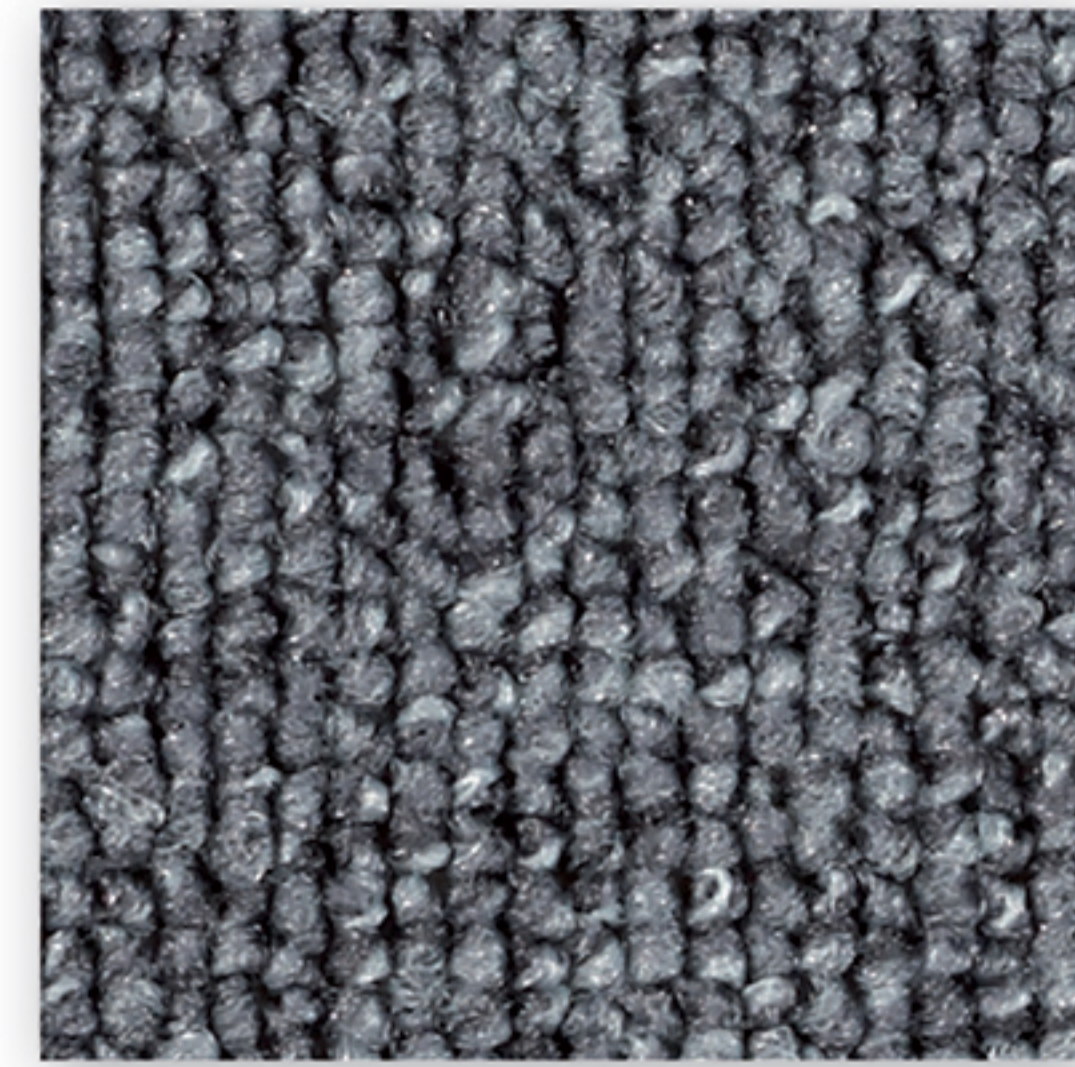


▲ QUA.852

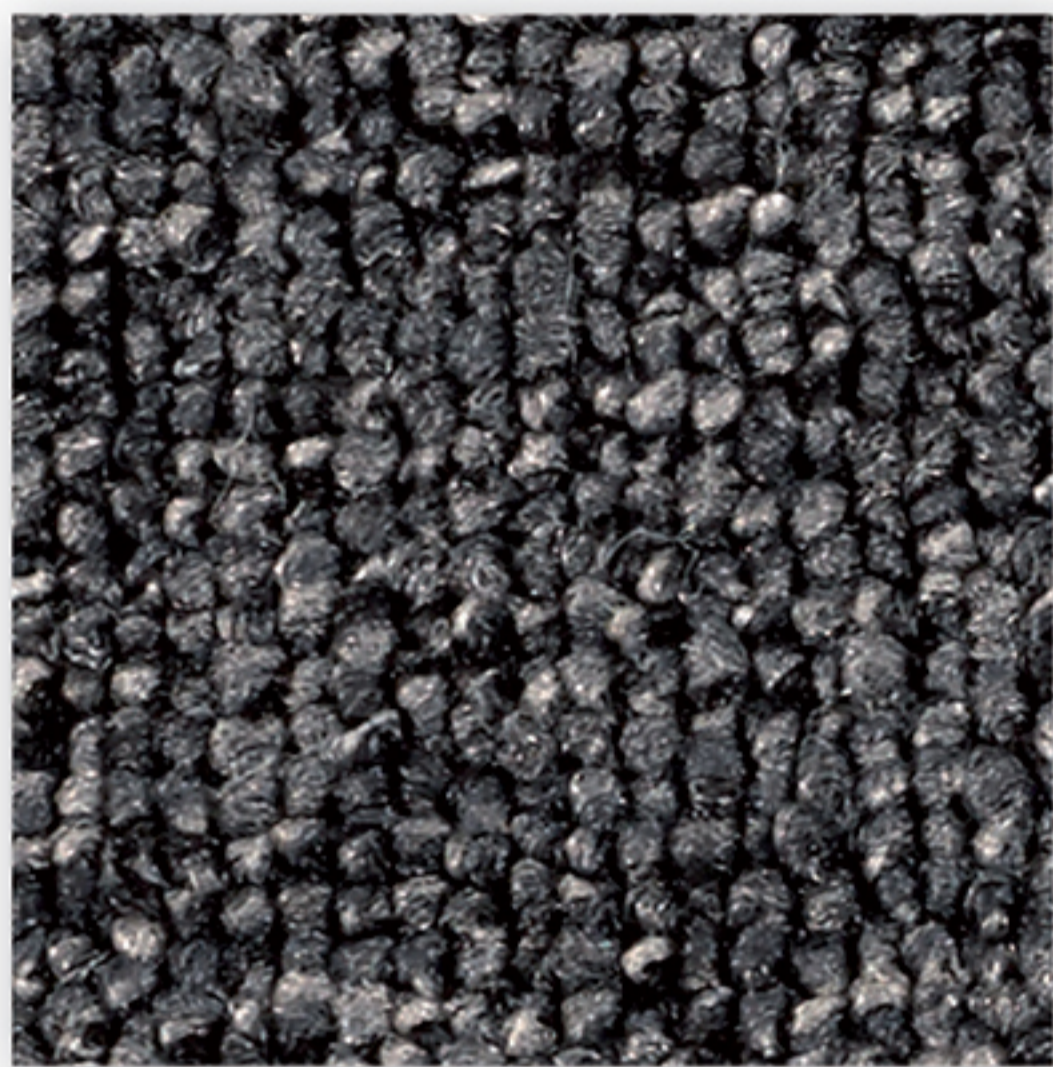


▲ QUA.802



▲ QUA.222

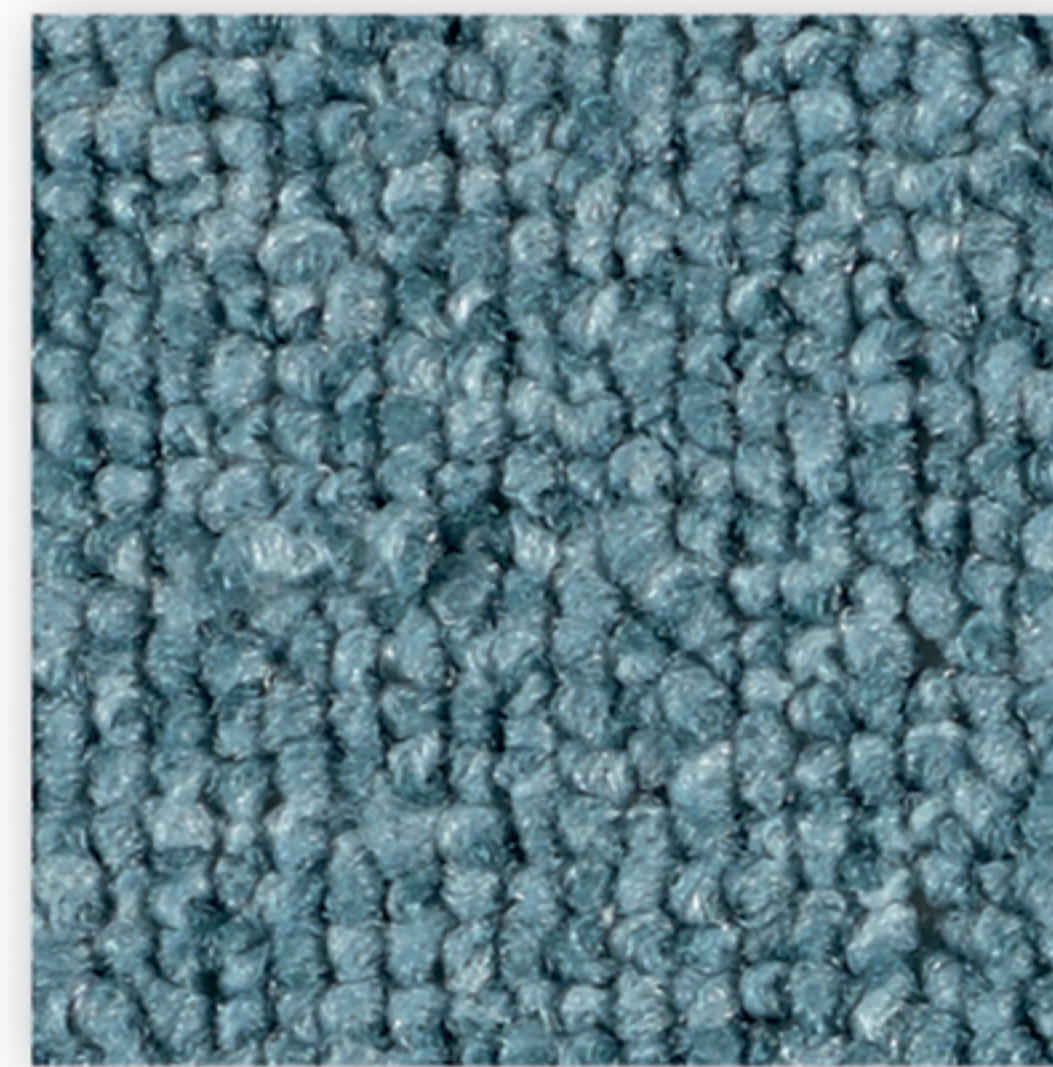

▲ QUA.652

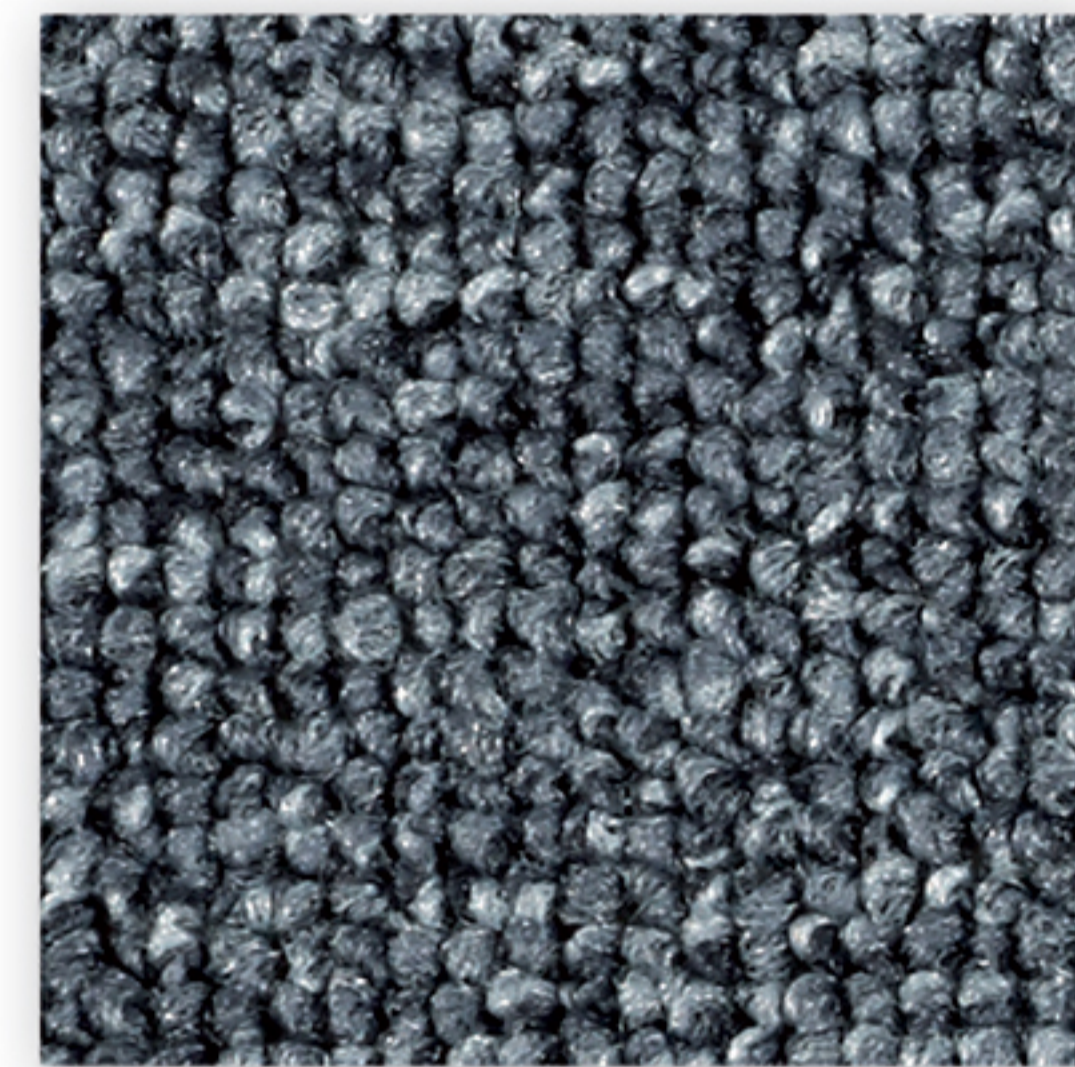


▲ QUA.842




▲ QUA.832



▲ QUA.452

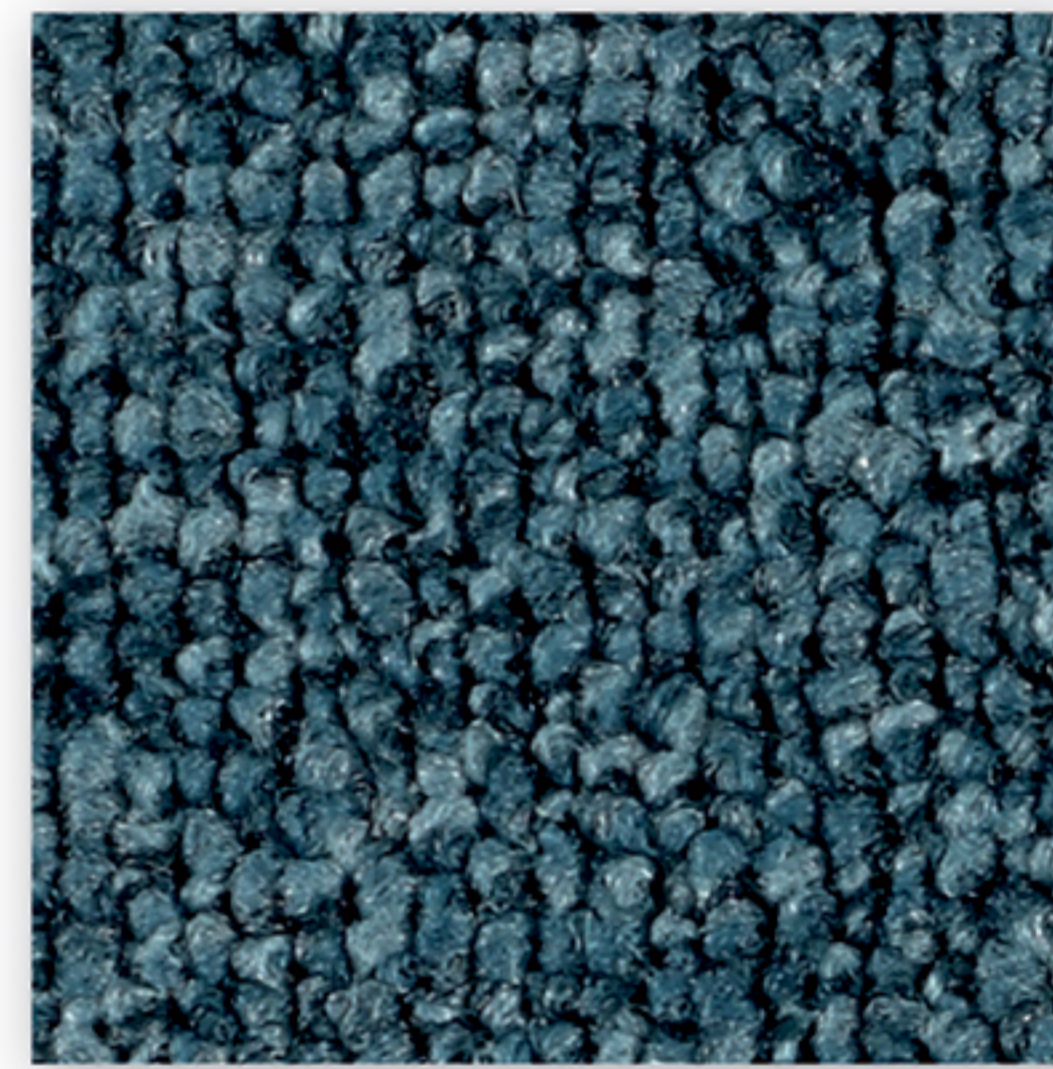

▲ QUA.682

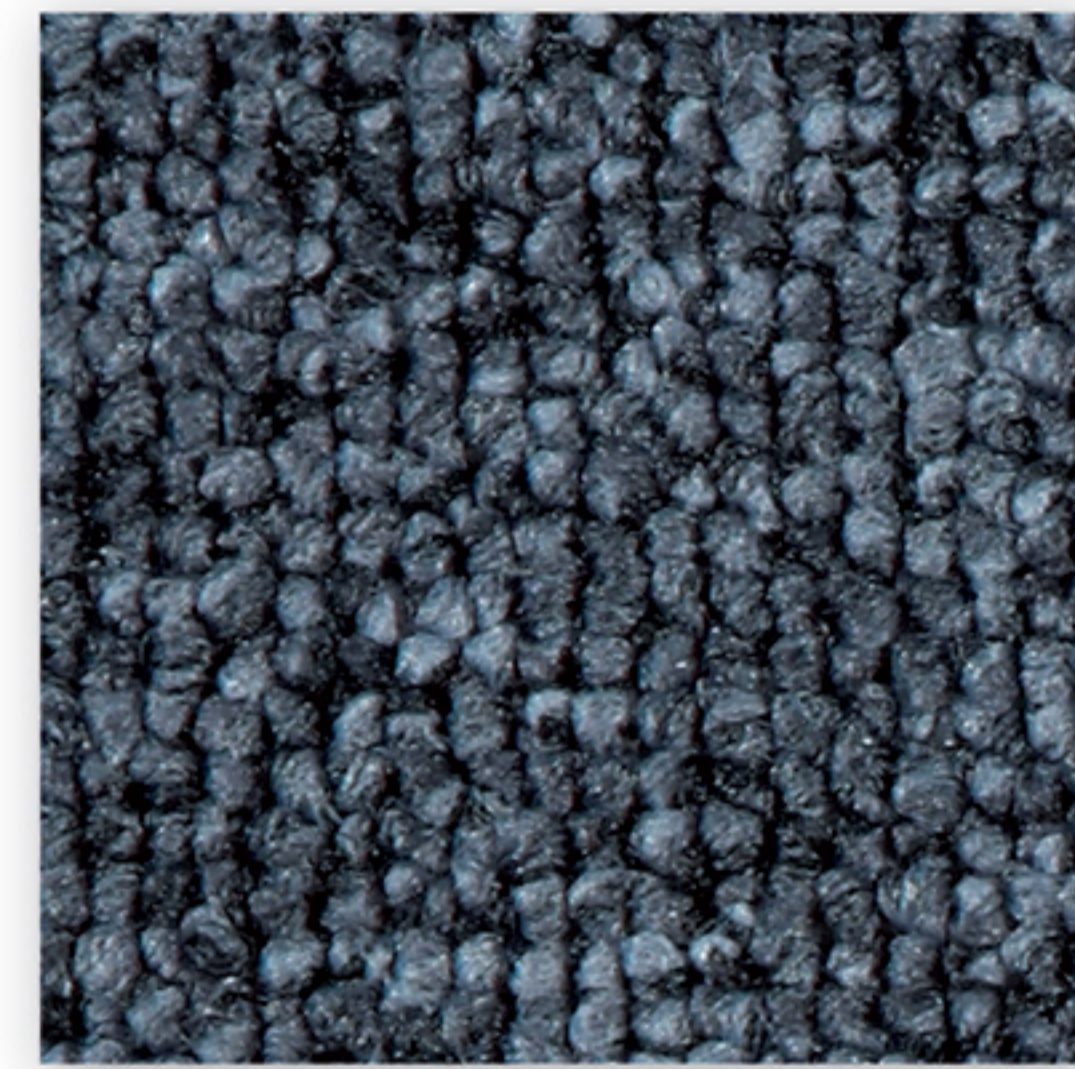


▲ QUA.811



▲ QUA.812



▲ QUA.232

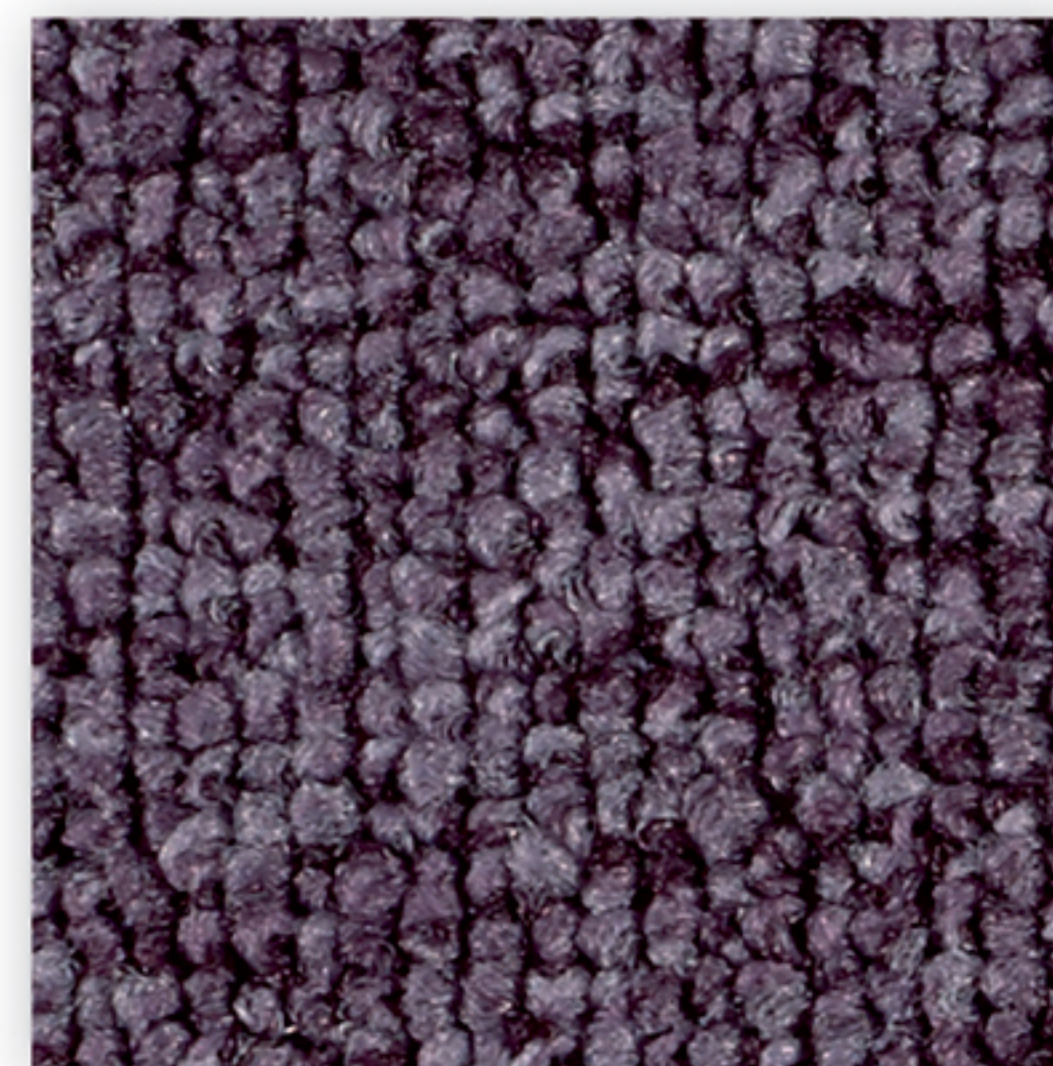

▲ QUA.032




▲ QUA.711




▲ QUA.282



▲ QUA.272

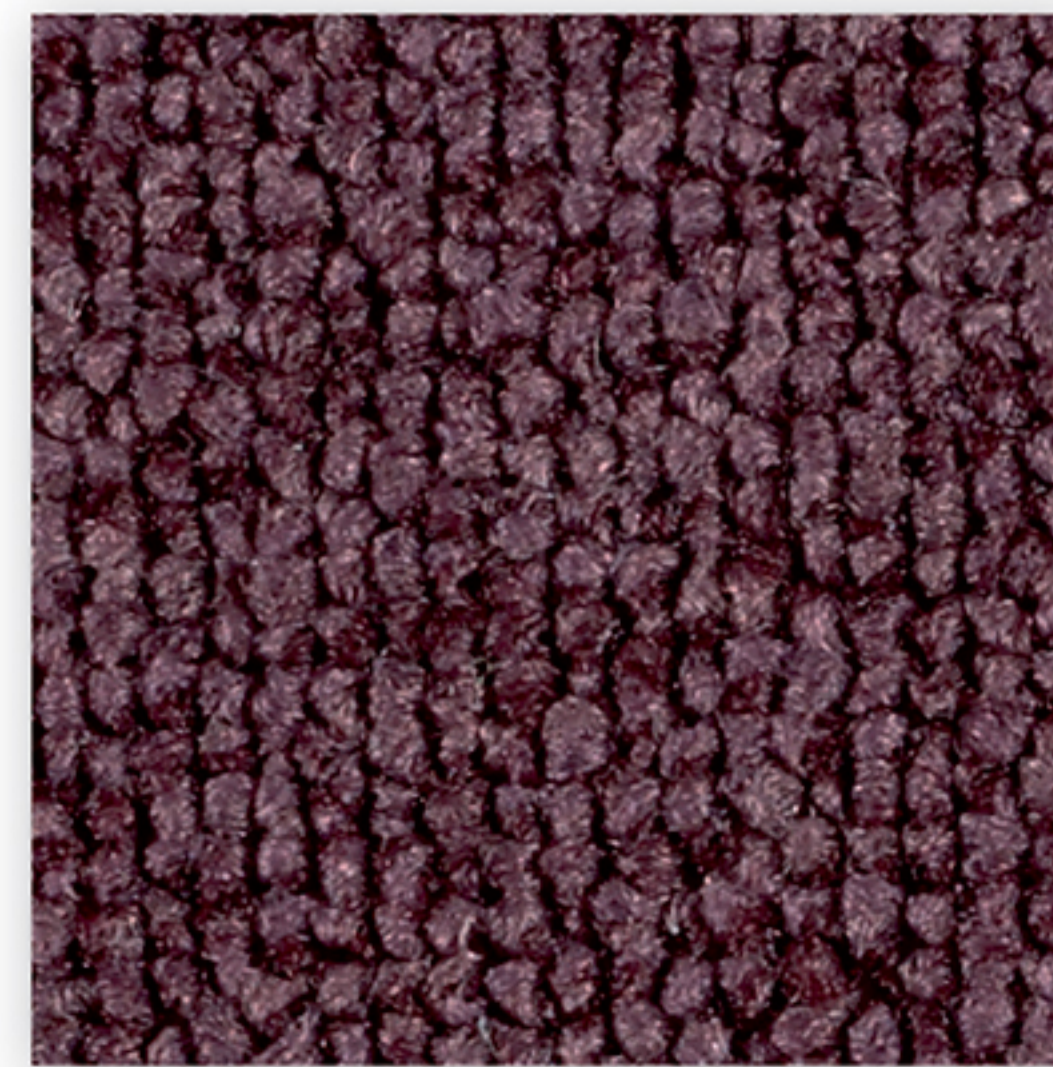

▲ QUA.062

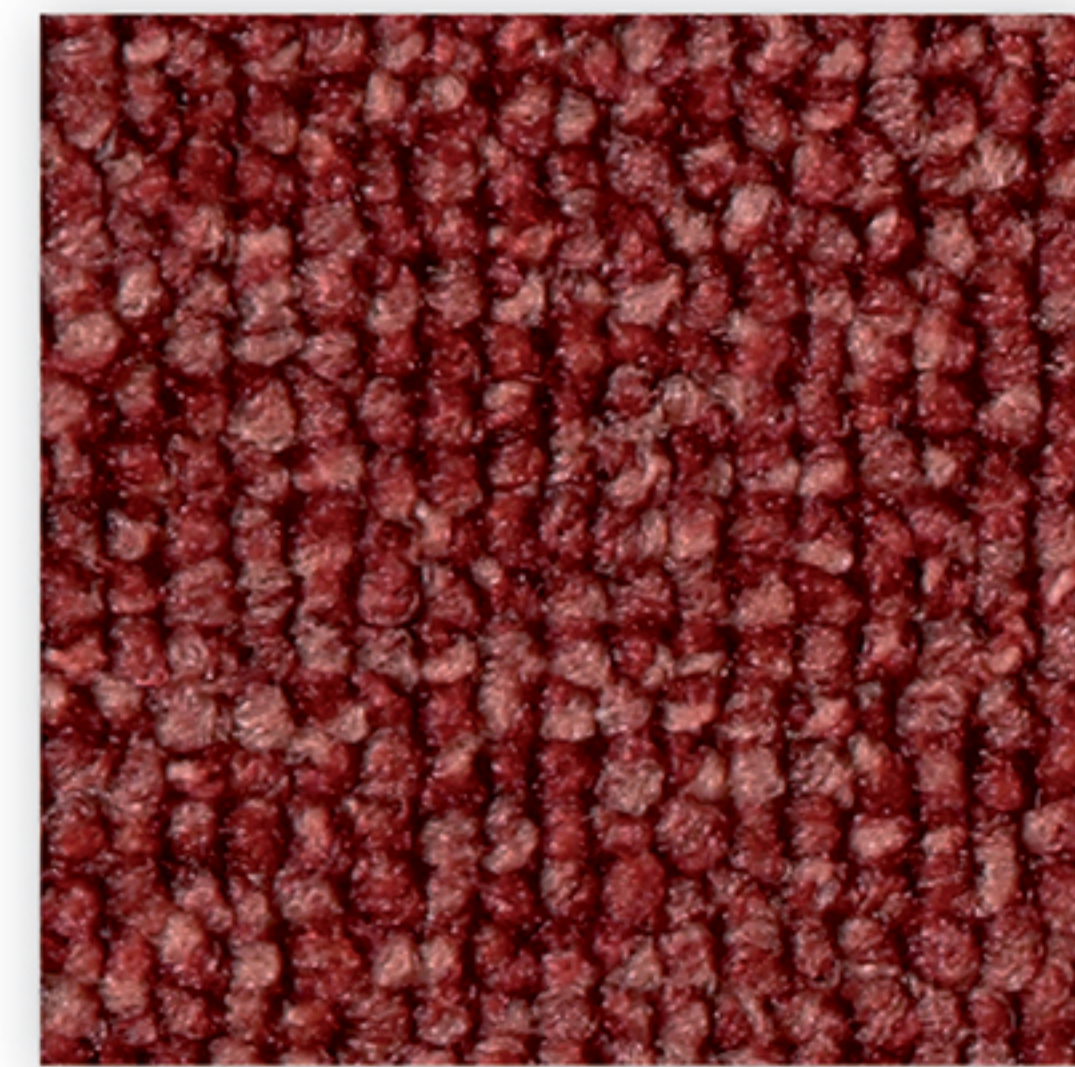


▲ QUA.111

QUARTZ

lano carpets

آرتوزس

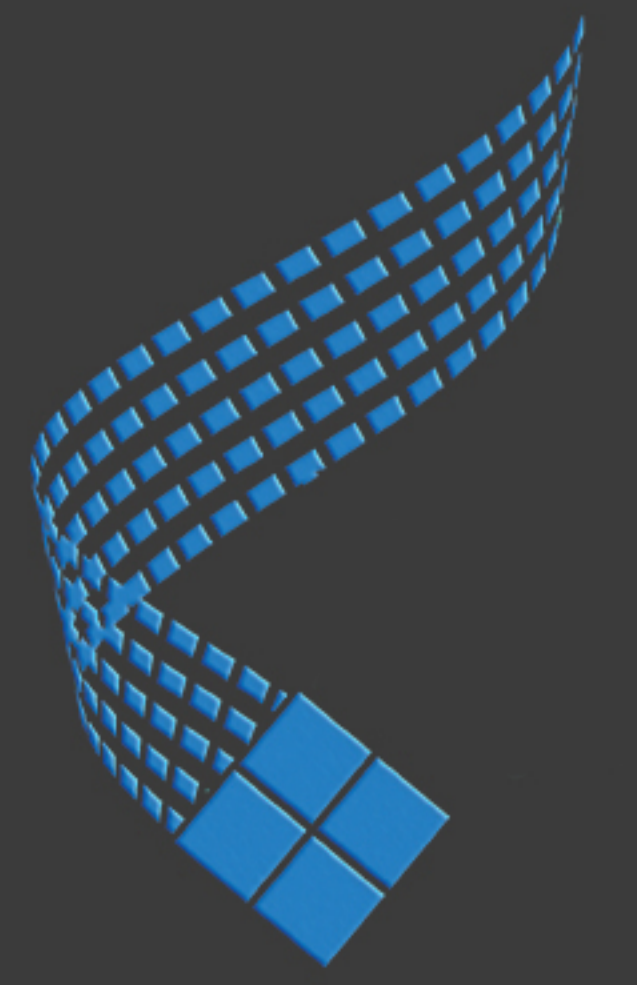

Fabricagemethode Technique de fabrication Manufacturing process Herstellungsart Tecnica di fabbricazione tufted, 1/10" loop pile	Poolsamenstelling Nature du velours Pile composition Polmaterial Composizione felpa PA	Tuftdoek Premier dossier Primary backing Trägermaterial Tela di supporto woven	Rugtype Envers Secondary backing Rücken Sottofondo SB
Totale dikte Hauteur totale Total height Gesamthöhe Spessore totale ± 4,5 mm	Nuttige poolhoogte Hauteur de velours utile Effective pile height Tatsächliche Florhöhe Spessore felpa utile ± 2,5 mm	Breedte Largeur Width Breite Altezza ± 400-500 cm	Aantal noppen/m² Nombre de points/m² Number of knots/sqm Noppenzahl/m² Numero di punti/mq ± 153660
Poolinzetgewicht/m² Poids mis en oeuvre/m² Pile weight/sqm Poleinsatzgewicht/m² Peso felpa/mq ± 400 gr	Totaal gewicht/m² Poids total/m² Total weight/sqm Poleinsatzgewicht/m² Peso totale/mq ± 1560 gr	EN 13501-1 Brandgedrag Comportement au feu Fire behaviour Brennverhalten Reazione al fuoco C_{fi}-S1	EN 1307 Classificatie Classification Classificazione Klassifizierung Class 23-32 Domestic Heavy Commercial General
DIN 52612 Warmtedoorlaatweerstand Résistivité thermique Thermal retention Wärmedurchlaßwiderstand Resistenza termica ± 0,053 m²/kW	TOG rating ± 0,53	ISO 6356 Teil 2: Permanent antistatisch Antistatique permanent Permanently antistatic Permanent antistatisch Antistatico permanente < 2 kV	ISO 6356 Teil 6: Oppervlakteweerstand RoT Résistance horizontale RoT Surface resistance RoT Oberflächenwiderstand RoT Resistenza in superficie RoT ≤ 10¹⁰ Ω
ISO 10965 Teil 6: Doorgangsweerstand RdT Résistance transversale RdT Vertical resistance RdT Durchgangswiderstand RdT Resistenza ai passaggi RdT ≤ 10¹⁰ Ω	ISO 105 B02 Lichtechtheid Solidité à la lumière Lightfastness Lichtechtheid Solidità colori alla luce ≥ 6	ISO 105 E01 Waterechtheid verkleuring Solidité à l'eau changement couleur Waterfastness change in colour Wasserechtheit Änderung der Farbe Solidità colori all'acqua cambio colore ≥ 4-5	ISO 105 E01 Waterechtheid uitbloeding Solidité à l'eau dégorgeement Waterfastness staining Wasserechtheit anbluten Solidità colori all'acqua sfumatura colore ≥ 3-4
ISO 105 X12 Wrijfechtheid droog Solidité au frottement sec Rubbingfastness dry Reibungechtheit trocken Solidità colori allo sfregamento a secco ≥ 4-5	ISO 105 X12 Wrijfechtheid nat Solidité au frottement humide Rubbingfastness wet Reibungechtheit nass Solidità colori allo sfregamento umido ≥ 4	Ce produit s'inscrit dans la démarche HQE (F.D.E.S. selon la norme NF P01-10 disponible sur demande). F.D.E.S. = fiche de données environnementales et sanitaires. HQE	

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading/

CE

0493-CPR-1038-119685
EN 14041

EN 1307

REG.NR

853F1C4C

www.pro-dis.info

BQA_QMS019_C_199460

HQE

ÉMISSIONS DANS L'AIR INTÉRIEUR

A+

A+ A B C

REACH

The new EU chemicals legislation